






PosiTector® **DPM** Probe Order Guide

Probe Style	DPM	DPMIR	DPMS	DPMA	DPMD
Comparison Chart					
Probe Description	Integral Probe	Integral Probe with Infrared Surface Temperature Sensor	Integral Probe with Cabled Surface Temperature Sensor	Integral Probe with Wind Speed Sensor	Cabled Probe with 1/2" NPT Threads
Order Code	PRBDPM	PRBDPMIR	PRBDPMS	PRBDPMA	PRBDPMD
Surface Temperature	•	•	•	•	
Air Temperature	•	•	•	•	•
Wet Bulb Temperature*	•	•	•	•	•
Relative Humidity	•	•	•	•	•
Dew Point Temperature	•	•	•	•	•
Surface Temperature minus Dew Point Temperature	•	•	•	•	
Wind Speed				•	

* Wet Bulb Temperature displayed/recorded on PosiTector Advanced (3) models only

Specifications	Range	Accuracy	Resolution
Surface Temperature	-40° to 80° C	± 0.5° C	0.1° C
	80° to 190° C	± 1.5° C	
	-40° to 175° F	± 1° F	0.1° F
	175° to 375° F	± 3° F	
Infrared Surface Temperature ¹	-70° to 380° C	± 1°C + 1% ²	0.1° C
	-94° to 716° F	± 2°F + 1% ²	0.1° F
Air Temperature	-40° to 80° C	± 0.5° C	0.1° C
	-40° to 175° F	± 1° F	0.1° F
Humidity	0 to 100%	± 3%	0.1%
Wind Speed ³	0 to 20 m/s	± 3% Full Scale + least significant digit	0.1 m/s
	0 to 44 mph		0.1 mph
Dew Point	-60° to 80° C	± 3° C ⁴	0.1° C
	-76° to 175° F	± 5.4° F ⁴	0.1° F


1. DPM IR models only

2. At 23° C (73° F) ambient

3. DPM A models only

4. dependent on RH. See www.defelsko.com/TdAccuracy for more information.

NPT 1/2" threads

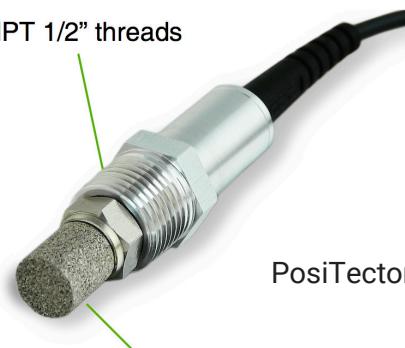

PosiTector DPMD

Sintered aluminum housing

- Sintered aluminum housing protects sensors
- 1/2" NPT threads for insertion into tanks and pipes (max 0.69 MPa/100 psi)

DeFelsko®
The Measure of Quality

DeFelsko Corporation 800 Proctor Ave., Ogdensburg, New York 13669-2205 USA
Toll Free 1-800-448-3835 • Tel: +1-315-393-4450 • Fax: +1-315-393-8471
techsale@defelsko.com • www.defelsko.com

© DeFelsko Corporation USA 2022. All Rights Reserved. Technical Data subject to change without notice. • DPMPRB2201


Made in U.S.A.